Gold Silver Ore Grinding Machine Three Rollers Water Wet Pan Mill 1200 Model 1 Tph Capacity Output Size 80-150 Meshes

Basic Information

Place of Origin: CHINABrand Name: AscendCertification: ISO9001

• Model Number: 1600 1500 1400 1200 1100 1000

• Minimum Order Quantity: 1 set

• Price: USD 3999-4999set

Packaging Details: Water and rust proof in wooden box or

cotainer

Delivery Time: 7-10 working days
 Payment Terms: T/T, Western Union
 Supply Ability: 20 set per month



Product Specification

Product Name: Wet Pan Mill
 Application: Gold Silver Ore
 Advantages: Easy To Operate

Color: According To Customer's Requirement

Highlight: 1200 model Gold Wet Pan Mill,
 1TPH Capacity Gold Wet Pan Mill



More Images







1100 1200 model three rollers water wet pan mill for gold ore grinding

Wet pan mill, also called chilean mill, gold round mill, water pan mill, wheel grinding machine and gold grinding machine. It is an ideal equipment for gold ore grinding in African and South American countries, which also can grinding silver, iron, copper, zinc and other precious metal ores. Wet pan mill because of its low investment, high capacity, easy to operate, convenient maintenance and other advantages, has became the first choice to replace ball mill. Wet pan mill according to the number of rollers can be divided into two roller wet pan mill and three roller wet pan mill. We mainly introduce the three roller water pan mill here. China Ascend three rollers wet pan mill has a larger capacity and better grinding effect than the double roller wet pan mill. Ascend triple rollers wet pan mils are well received in African countries.

Product pictures








Working principle

The motor drives the speed reducer through the V-belt, and then the speed reducer drives the rollers, so that the rollers rotate in the clockwise direction. We add raw materials and liquid in a certain proportion into the basin. The materials and liquid in the basin are evenly mixed as the rollers rotate. At the same time, the materials are repeatedly stirred, crushed and ground with the friction between the roller and the grinding base. After being ground to a certain fineness, they are discharged with water to achieve the purpose of mineral processing.

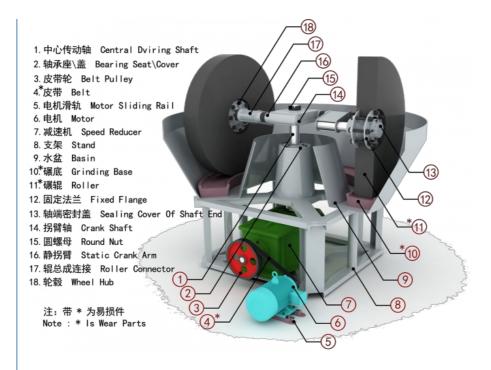

Advantages

The wet pan mill generally adopts the mixed mercury gold selection method, which is simple and easy to extract gold. The wet pan mill is cheaper than ball mill, it has the advantages of low investment and high efficiency. Gold can be extracted on the day of operation, and begin to recover the investment.

It is easy to install and operate. Workers can operate it after reading the installation introduction and operation manual provided by the manufacturer. When moving the site, the wet pan mill is very convenient to transport and does not damage the equipment

The wet pan mill machine has a simple structure, is sturdy and durable, and has a low maintenance frequency.

The three rollers wet pan mill has a bigger capacity than the two rollers wet pan mill, and it is more suitable for small and medium gold miners.

Specification

Model	Type (mm)	Max feed size (mm)	Capacity(t/h)	Power(kw)	Weight(ton)
1600	1600x350x200x460	25	1-2	Y6L-30	13.5
1500	1500x300x150x420	25	0.8-1.5	Y6L-22	11.3
1400	1400x260x150x350	25	0.5-0.8	Y6L-18.5	8.5
1200	1200x180x120x250	25	0.25-0.5	Y6L-7.5	5.5
1100	1100x160x120x250	25	0.15-0.25	Y6L-5.5	4.5
1000	1000x180x120x250	25	0.15-0.2	Y6L-5.5	4.3

Wet pan mill operating rules

- 1. The operator must be trained by the manufacturer and fully understand the structure and performance of the machine before they can operate. The operator must comply with the relevant safety and shift transfer system.
- 2. Before work, strictly follow the lubricating oil regulations to refuel, and keep the oil amount appropriate, the oil circuit smooth, and the oil injection port clean.
- 3. Check whether the circuit, electrical parts, line connectors, switches are solid and complete. If there is damage, it must be repaired and replaced.
- 4. Check whether the parts of the machine are intact, whether the roller rotates flexibly, the tightness of the transmission belt, and whether the transmission parts are securely connected; After the inspection is completed, the boot idling for 3-5 minutes, confirm that the parts are normal, before adding the ore, and must be added in strict accordance with the prescribed amount of ore, it is strictly prohibited to overload work.
- 5. When feeding the ore, the material must be sifted to prevent hard metal debris such as iron blocks from being put into the mill and damaging the machine.
- 6. When stopping for some reason, the material in the roller should be removed first, and then started. It is strictly prohibited to forcibly start with heavy load.
- 7. When the machine is in operation, the operator shall not leave, and should often inspect the working conditions of various parts. In case of abnormal sound of the equipment, large vibration of the roller, excessive temperature of the reducer oil, overheating of the motor housing, and slip of the transmission belt, the machine should be shut down immediately.
- 8. During the shutdown process, when the roller is not completely stopped, it is not allowed to extend the arm and other instruments into the roller basin to prevent injury and damage to the machine.

Spare Parts



Product delivery





Working site






We also supply







Contact us

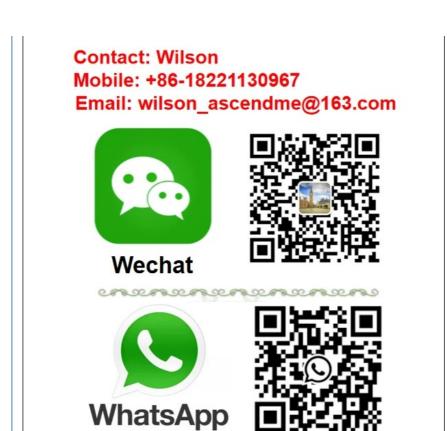

ASCEND Henan Ascend Machinery Equipment Co., Ltd.







mining-crushermachine.com

Shenglong block, high tech zone, Zhengzhou, China